Downloaded from http://www.everyspec.com

USER INTEREST ARMY: MO NAVY: MC

REVIEW INTEREST ARMY: MU NAVY: SH AF: 11

FED. SUP CLASS 5940

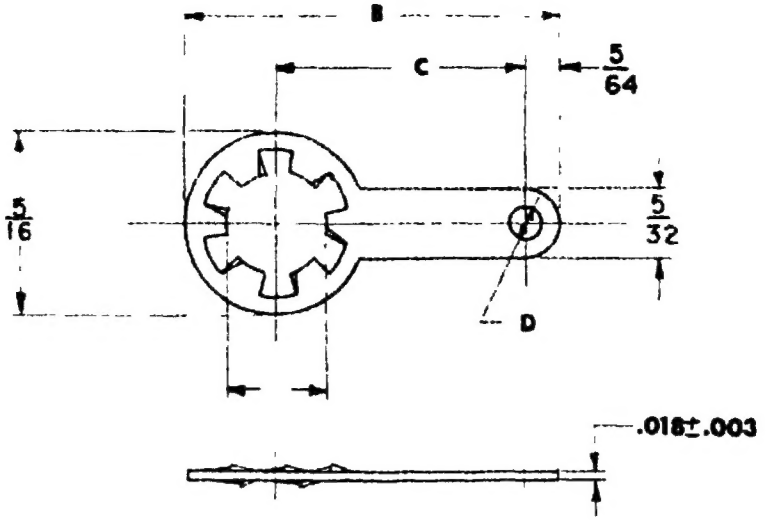

DASH NUMBER	SCREW SIZE	HOLE DIA A		B	C	D	AWG SIZE
		MAX.	MIN.				
1	4	.127	.115	47/64	1/2	3/32	12 TO 20
2	6	.153	.141	47/64	1/2	3/32	
3	6	.153	.141	31/64	1/4	5/64	14 TO 20
4	8	.179	.167	47/64	1/2	3/32	12 TO 20

MATERIAL: PHOSPHOR BRONZE (1.25% TIN), GRADE E, NO. 502.

FINISH: HOT TIN DIP OR ELECTRO-DEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005.

NOTES:

1. ALL DIMENSIONS IN INCHES. TOLERANCE: FRACTIONAL ± 1/64; UNLESS OTHERWISE SPECIFIED.
2. MAXIMUM BURR OF .005 IS ALLOWABLE.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 Sep 65 REVISED

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

P.A.	MU
Other Cust.	SH
	11

REQUIREMENT SPECIFICATION: MIL-T 15659

TYPE TERMINAL, LUG, SOLDER TYPE, PHOSPHOR BRONZE STAMPING, LOCKING TYPE, FLAT, ONE HOLE

SUPERSEDES

MILITARY STANDARD

MS 77072

SHEET 1 OF 1

DD FORM 1000 672-1 (Continued)